

Here you will find all single spare parts as well as fitted segments for your boom pole.

PLEASE READ NECESSARILY

[BOOM MAINTENANCE & REPAIR](#)

BEFORE REPAIRING YOUR BOOM POLE!

QX STANDARD BOOM POLE, FITTED SEGMENTS	2
Segments for QX 550	4
SQX550/18	5
SQX550/22	8
SQX550/26	10
SQX550/30	12
SQX550/34	14
Segments for QX 565	16
SQX565/18	16
SQX565/22	19
SQX565/26	22
SQX565/30	25
SQX565/34	28
Segments for QX 580	30
SQX580/18	30
SQX580/22	33
SQX580/26	36
SQX580/30	39
SQX580/34	42
Segments for QX 5100	44
SQX5100/18	44
SQX5100/22	47
SQX5100/26	50
SQX5100/30	53
SQX5100/34	56
Segments for QX 5130	58
SQX5130/18	58
SQX5130/22	61
SQX5130/26	64
SQX5130/30	67
SQX5130/34	70
QX-STANDARD-TONANGEL, ERSATZTEILE – EINZELN	72

QX Standard Boom Pole, fitted segments

Single tubes for orientation

Please specify boom pole (for example: **QX 550**) and diameter of tube segment (for example: **[SQX550/18](#)**) by order.

RQX550/18, RQX565/18, RQX580/18, RQX5100/18 and RQX5130/18

Tube segment with the smallest diameter.
Inner diameter: 16 mm, Outer diameter: 18 mm



RQX550/22, RQX565/22, RQX580/22, RQX5100/22 and RQX5130/22

Tube segment:
Inner diameter: 20 mm, Outer diameter: 22 mm



RQX550/26, RQX565/26, RQX580/26, RQX5100/26 and RQX5130/26

Tube segment:

Inner diameter: 24 mm, Outer diameter: 26 mm



RQX550/30, RQX565/30, RQX580/30, RQX5100/30 and RQX5130/30

Tube segment:

Inner diameter: 28 mm, Outer diameter: 30 mm



RQX550/34, RQX565/34, RQX580/34, RQX5100/34 and RQX5130/34

Tube segment:

Inner diameter: 32 mm, Outer diameter: 34 mm



Segments for QX 550

SQX550/18



Tube segment for QX 550

Note: fig. SQXS565/18


Please follow the length in Technical Details below or under RQX550/18

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX550/18 comprises:

Tube segment diameter = 16/18 mm ([RQX550/18](#))

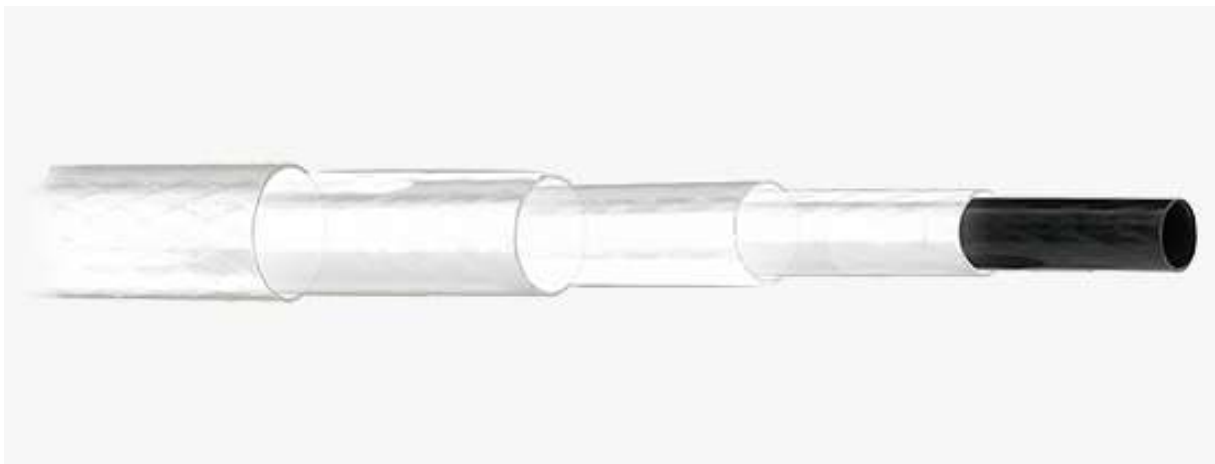

Spare Parts & Spare Segments for QX Boom Pole

Threaded tip incl. leather washer & aluminum ring ([V2AQL](#) incl. [QSPLW](#) and [ALQL](#))



Hand nut for thread on tube segment with outer diameter of 22 mm ([MQX22](#))

Compression ring ([RQL22](#))



[Velcro](#) fitted



[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 16 mm

Outer diameter: 18 mm

Length (RQX550/18 without tip): 445 mm

Materials

Tube: carbon fiber, pull-braiding

Threaded tip: stainless steel

Ring: aluminum blue anodized

Hand nut: aluminum black anodized

Compression ring: POM

SQX550/22



Tube segment for QX 550

Note: fig. SQX565/22

Please follow the length in Technical Details below or under RQX550/22

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX550/22 comprises:

Tube segment diameter = 20/22 mm ([RQX550/22](#))



Thread incl. Silicone ring ([GQL22](#) incl. [OR22](#))



GQL22

Hand nut for thread on tube segment with outer diameter of 26 mm ([MOX26](#))

Compression ring ([RQL26](#))



[Velcro](#) fitted



[Silicone grease](#) for threads and Velcro bushings

Technical Details

Inner diameter: 20 mm

Outer diameter: 22 mm

Length (RQX550/22): 420 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 22 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX550/26



Tube segment for QX 550

Note: fig. SQX565/26

Please follow the length in Technical Details below or under RQX550/26

For easy replacement even in the field, the spare segments are ready made with all necessary parts.


Thus, the boom can be used again immediately.

The complete spare segment SQX550/26 comprises:

Tube segment diameter = 24/26 mm ([RQX550/26](#))



Thread incl. Silicone ring ([GOL26](#) incl. [OR26](#))

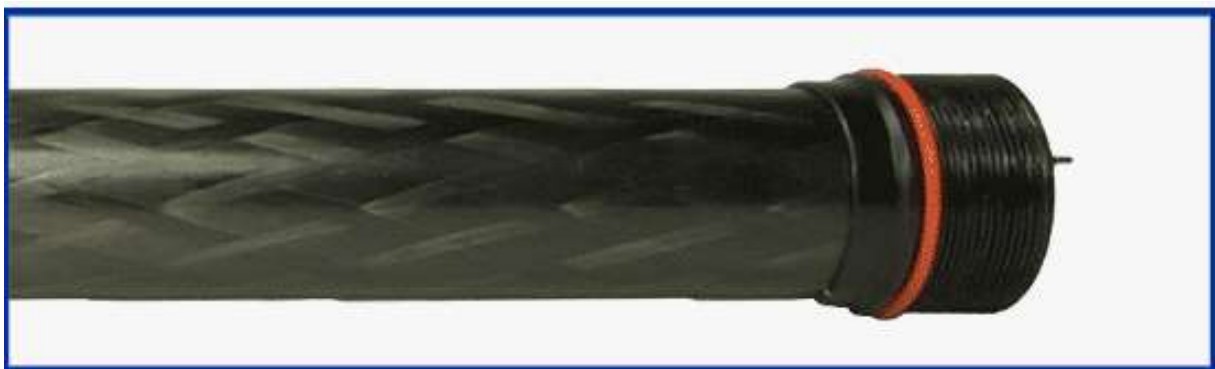

GOL26

Hand nut for thread on tube segment with outer diameter of 30 mm ([MOX30](#))

Compression ring ([RQL30](#))



[Velcro](#) fitted



[Silicone grease](#) for threads and Velcro bushings

Technical Details

Inner diameter: 24 mm

Outer diameter: 26 mm

Length (RQX550/26): 390 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 26 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX550/30



Tube segment for QX 550

Note: fig. SQX565/30

Please follow the length in Technical Details below or under RQX550/30

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX550/22 comprises:


Tube segment diameter = 28/30 mm ([RQX550/30](#))



Thread incl. Silicone ring ([GQL30](#) incl. [OR30](#))



Hand nut for thread on tube segment with outer diameter of 34 mm ([MOX34](#))

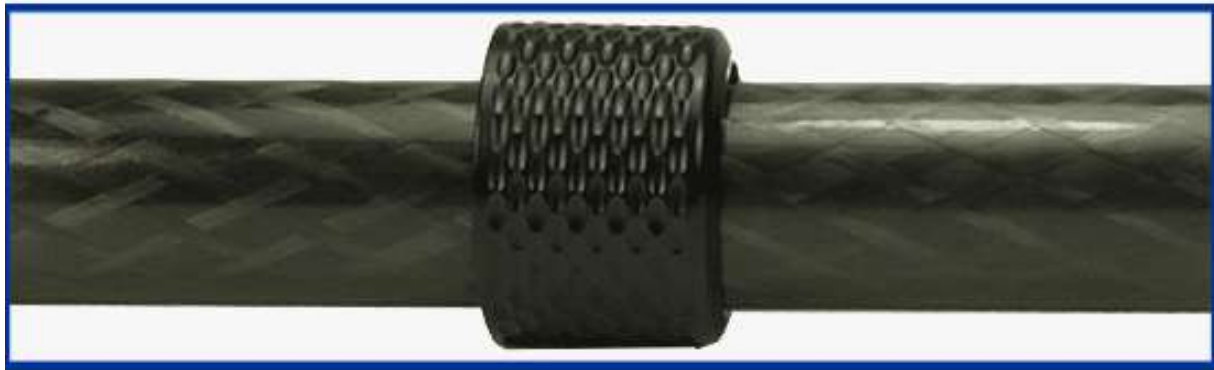

MOX34

Compression ring ([RQL34](#))

[Velcro](#) fitted



Velcro

RQL34

[Silicone grease](#) for threads and Velcro bushings

Technical Details

Inner diameter: 28 mm

Outer diameter: 30 mm

Length (RQX550/30): 360 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 30 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX550/34



Tube segment for QX 550

Note: fig. SQXS565/34


Please follow the length in Technical Details below or under RQX550/34

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX550/22 comprises:

Tube segment diameter = 32/34 mm ([RQX550/34](#))

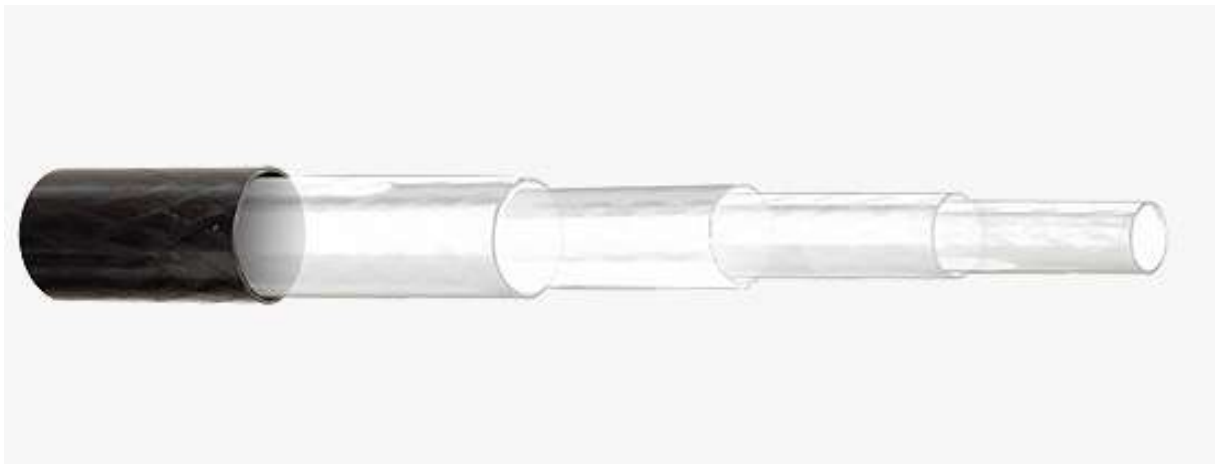

Thread incl. Silicone ring ([GQL34](#) incl. [OR34](#))



GQL30

QX-Endstück ([QSPBX](#))



QSPBX

[Silicone grease](#) for threads and Velcro bushings

Technical Details

Inner diameter: 32 mm

Outer diameter: 34 mm

Length (RQX550/34): 330 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 34 mm

Metal End: aluminum black anodized

Segments for QX 565

SQX565/18



Tube segment for QX 565

Note: fig. SQX565/18

Please follow length under Technical Details and under RQX565/18

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX565/18 comprises:

Tube segment diameter = 16/18 mm ([RQX565/18](#))



Spare Parts & Spare Segments for QX Boom Pole

Threaded tip incl. leather washer & aluminum ring ([V2AQL](#) incl. [QSPLW](#) and [ALQL](#))



Hand nut for thread on tube segment with outer diameter of 22 mm ([MOX22](#))
Compression ring ([RQL22](#))



[Velcro](#) fitted



[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 16 mm

Outer diameter: 18 mm

Length (RQX565/18 without tip): 595 mm

Materials

Tube: carbon fiber, pull-braiding

Threaded tip: stainless steel

Ring: aluminum blue anodized

Hand nut: aluminum black anodized

Compression ring: POM

SQX565/22



Tube segment for QX 565

Note: fig. SQX565/22

Please follow length under Technical Details and under RQX565/22

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX565/22 comprises:

Tube segment diameter = 20/22 mm ([RQX565/22](#))



Thread incl. Silicone ring ([GQL22](#) incl. [OR22](#))



GQL22


Hand nut for thread on tube segment with outer diameter of 26 mm ([MQX26](#))
Compression ring ([RQL26](#))



RQL26

MQX26

[Velcro](#) fitted

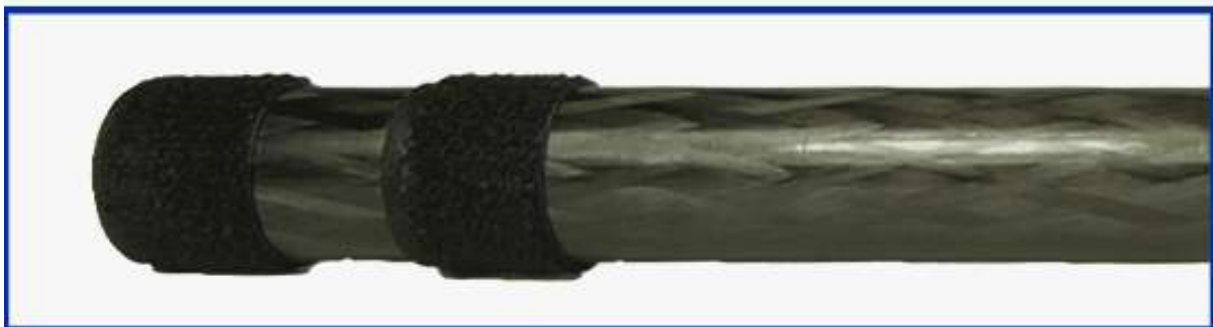

Velcro

[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 20 mm

Outer diameter: 22 mm

Length (RQX565/22): 570 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 22 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX565/26



Tube segment for QX 565

Note: fig. SQX565/26

Please follow length under Technical Details and under RQX565/26

For easy replacement even in the field, the spare segments are ready made with all necessary parts.


Thus, the boom can be used again immediately.

The complete spare segment SQX565/26 comprises:

Tube segment diameter = 24/26 mm ([RQX565/26](#))




Thread incl. Silicone ring ([GQL26](#) incl. [OR26](#))

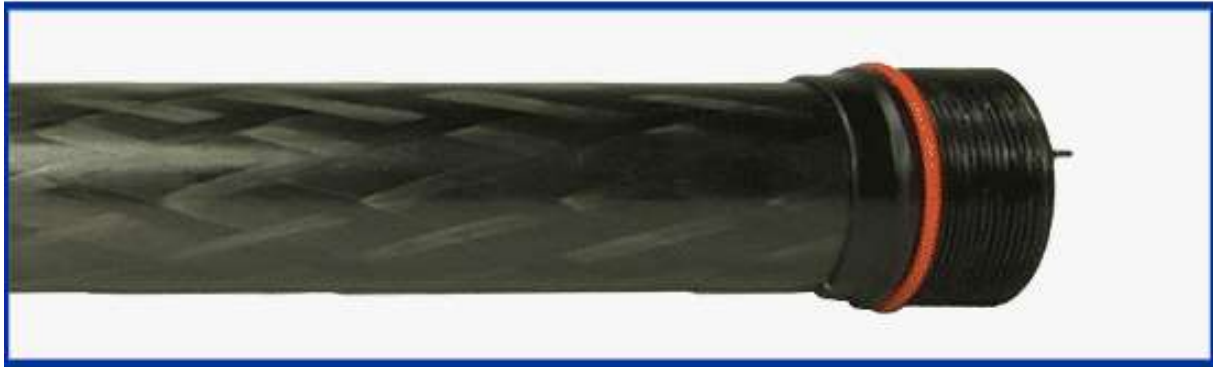

GQL26

Hand nut for thread on tube segment with outer diameter of 30 mm ([MQX30](#))
Compression ring ([RQL30](#))

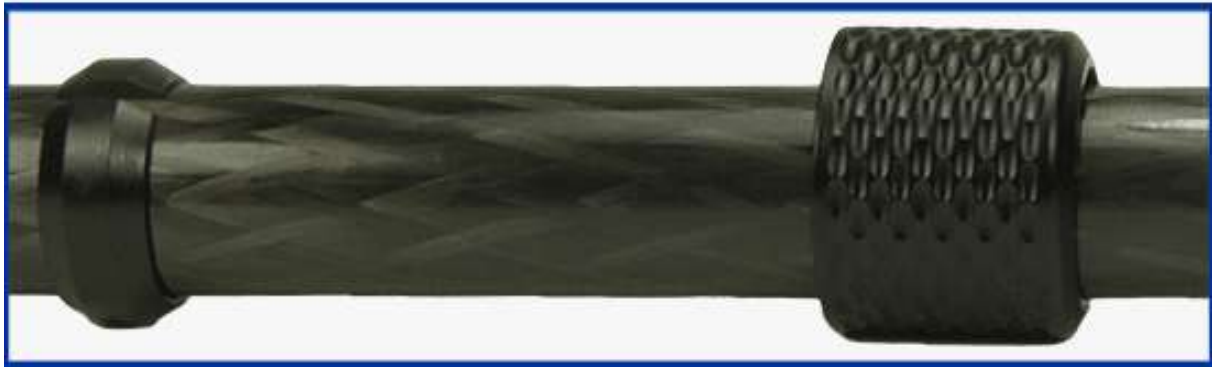

RQL30

MQX30

[Velcro](#) fitted



Velcro

[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 24 mm

Outer diameter: 26 mm

Length (RQX565/26): 540 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 26 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX565/30



Tube segment for QX 565

Note: fig. SQX565/30

Please follow length under Technical Details and under RQX565/30

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX565/30 comprises:

Tube segment diameter = 28/30 mm ([RQX565/30](#))




Thread incl. Silicone ring ([GQL30](#) incl. [OR30](#))



GQL30

Hand nut for thread on tube segment with outer diameter of 34 mm ([MQX34](#))

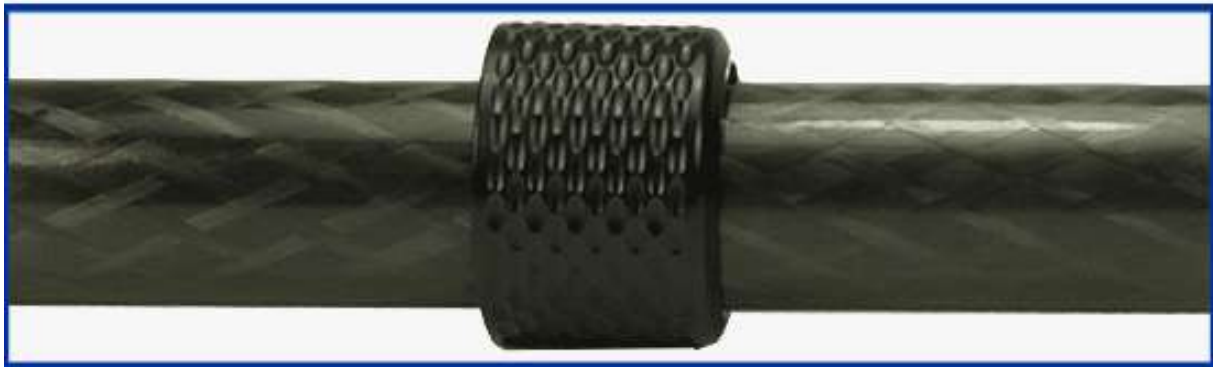

MQX34

Compression ring ([RQL34](#))

[Velcro](#) fitted



Velcro

RQL34

[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 28 mm

Outer diameter: 30 mm

Length (RQX565/30): 510 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 30 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX565/34



Tube segment for QX 565

Note: fig. SQX565/30

Please follow length under Technical Details and under RQX565/34

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX565/34 comprises:

Tube segment diameter = 32/34 mm ([RQX565/34](#))



Thread incl. Silicone ring ([GQL34](#) incl. [OR34](#))



GQL30

QX-Endstück ([QSPBX](#))



QSPBX

[Silicone grease](#) for threads and Velcro bushings

Technical Details

Inner diameter: 32 mm

Outer diameter: 34 mm

Length (RQX565/34): 480 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 34 mm

Metal End: aluminum black anodized

Segments for QX 580

SQX580/18



Tube segment for QX 580

Note: fig. SQX565/18

Please follow length under Technical Details and under RQX580/18

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX580/18 comprises:

Tube segment diameter = 16/18 mm ([RQX580/18](#))



Spare Parts & Spare Segments for QX Boom Pole

Threaded tip incl. leather washer & aluminum ring ([V2AQL](#) incl. [QSPLW](#) and [ALQL](#))



Hand nut for thread on tube segment with outer diameter of 22 mm ([MOX22](#))
Compression ring ([RQL22](#))



[Velcro](#) fitted



[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 16 mm

Outer diameter: 18 mm

Length (RQX580/18 without tip): 745 mm

Materials

Tube: carbon fiber, pull-braiding

Threaded tip: stainless steel

Ring: aluminum blue anodized

Hand nut: aluminum black anodized

Compression ring: POM

SQX580/22



Tube segment for QX 580

Note: fig. SQX565/22

Please follow length under Technical Details and under RQX580/22

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX580/22 comprises:

tube segment diameter = 20/22 mm ([RQX580/22](#))



Thread incl. Silicone ring ([GQL22](#) incl. [OR22](#))



GQL22


Hand nut for thread on tube segment with outer diameter of 26 mm ([MQX26](#))
Compression ring ([RQL26](#))



RQL26

MQX26

[Velcro](#) fitted

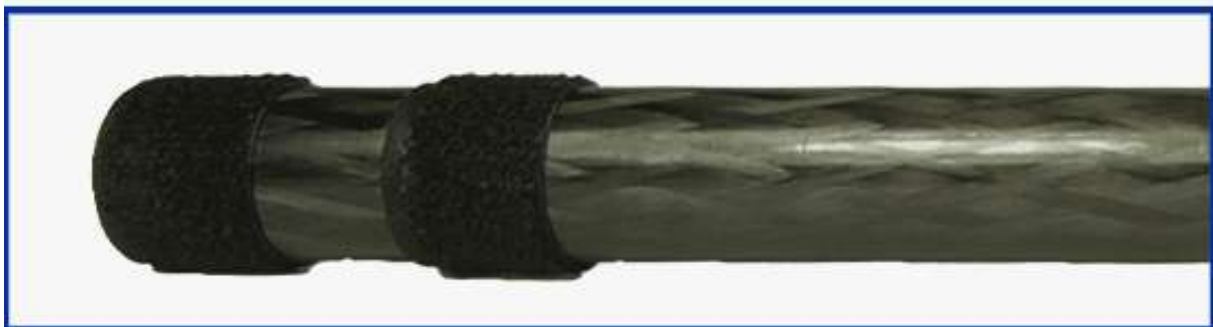

Velcro

[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 20 mm

Outer diameter: 22 mm

Length (RQX580/22): 720 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 22 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX580/26



Tube segment for QX 580

Note: fig. SQX565/26

Please follow length under Technical Details and under RQX580/26

For easy replacement even in the field, the spare segments are ready made with all necessary parts.


Thus, the boom can be used again immediately.

The complete spare segment SQX580/26 comprises:

Tube segment diameter = 24/26 mm ([RQX580/26](#))



Thread incl. Silicone ring ([GQL26](#) incl. [OR26](#))

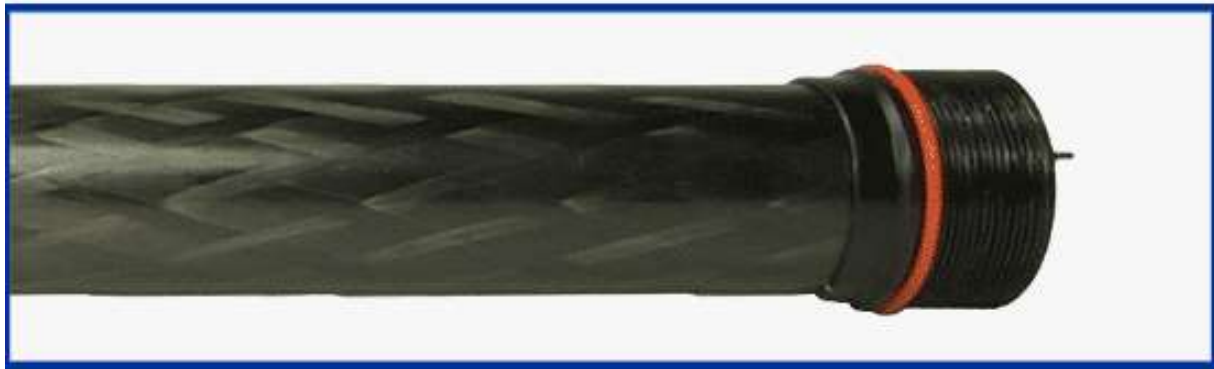

GQL26

Hand nut for thread on tube segment with outer diameter of 30 mm ([MOX30](#))
Compression ring ([RQL30](#))



RQL30

MOX30

[Velkro](#) fitted



Velkro

[Silicone grease](#) for threads and Velkro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 24 mm

Outer diameter: 26 mm

Length (RQX580/26): 690 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 26 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX580/30



Tube segment for QX 580

Note: fig. SQX565/30

Please follow length under Technical Details and under RQX580/30

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX580/30 comprises:

Tube segment diameter = 28/30 mm ([RQX580/30](#))




Thread incl. Silicone ring ([GQL30](#) incl. [OR30](#))



GQL30

Hand nut for thread on tube segment with outer diameter of 34 mm ([MQX34](#))

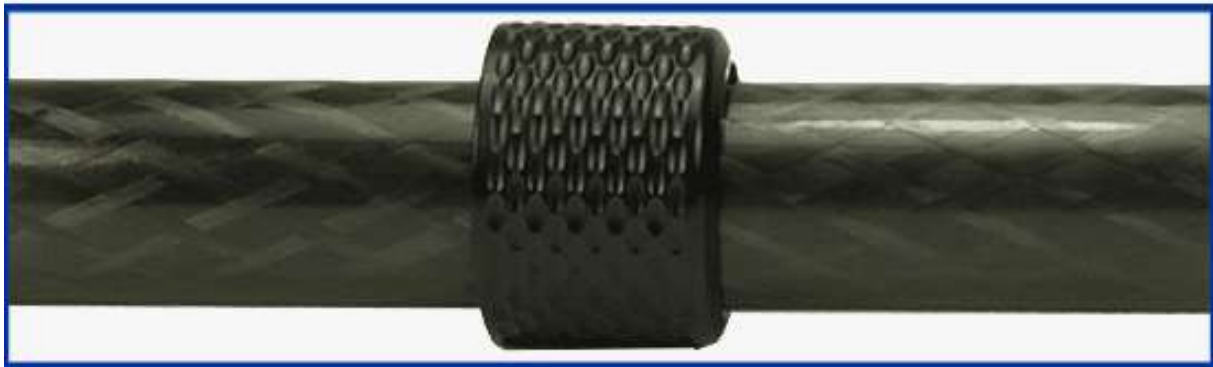

MQX34

Compression ring ([RQL34](#))

[Velkro](#) fitted



Velkro

RQL34

[Silicone grease](#) for threads and Velkro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 28 mm

Outer diameter: 30 mm

Length (RQX580/30): 660 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 30 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX580/34



Tube segment for QX 580

Note: fig. SQX565/34


Please follow length under Technical Details and under RQX580/34

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX580/34 comprises:

Tube segment diameter = 32/34 mm ([RQX580/34](#))

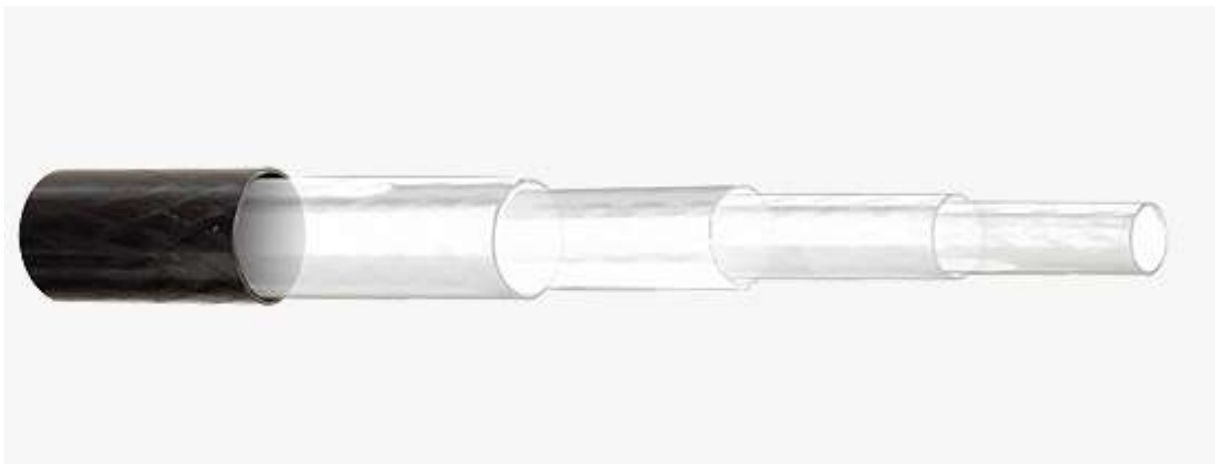

Thread incl. Silicone ring ([GQL34](#) incl. [OR34](#))



GQL30

QSPBX

QX-Endstück ([QSPBX](#))



QSPBX

[Silicone grease](#) for threads and Velcro bushings

Technical Details

Inner diameter: 32 mm

Outer diameter: 34 mm

Length (RQX580/34): 630 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 34 mm

Metal End: aluminum black anodized

Segments for QX 5100

SQX5100/18



tube segment for QX 5100

Note: fig. SQX565/18

Please follow length under Technical Details and under RQX5100/18

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX5100/18 comprises:

Tube segment diameter = 16/18 mm ([RQX5100/18](#))



Spare Parts & Spare Segments for QX Boom Pole

Threaded tip incl. leather washer & aluminum ring ([V2AQL](#) incl. [QSPLW](#) and [ALQL](#))



Hand nut for thread on tube segment with outer diameter of 22 mm ([MQX22](#))

Compression ring ([RQL22](#))



[Velcro](#) fitted



[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 16 mm

Outer diameter: 18 mm

Length (RQX5100/18 without tip): 945 mm

Materials

Tube: carbon fiber, pull-braiding

Threaded tip: stainless steel

Ring: aluminum blue anodized

Hand nut: aluminum black anodized

Compression ring: POM

SQX5100/22



Tube segment for QX 5100

Note: fig. SQX565/22

Please follow length under Technical Details and under RQX5100/22

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX5100/22 comprises:

Tube segment diameter = 20/22 mm ([RQX5100/22](#))



Thread incl. Silicone ring ([GQL22](#) incl. [OR22](#))



GQL22


Hand nut for thread on tube segment with outer diameter of 26 mm ([MQX26](#))
Compression ring ([RQL26](#))



RQL26

MQX26

[Velcro](#) fitted

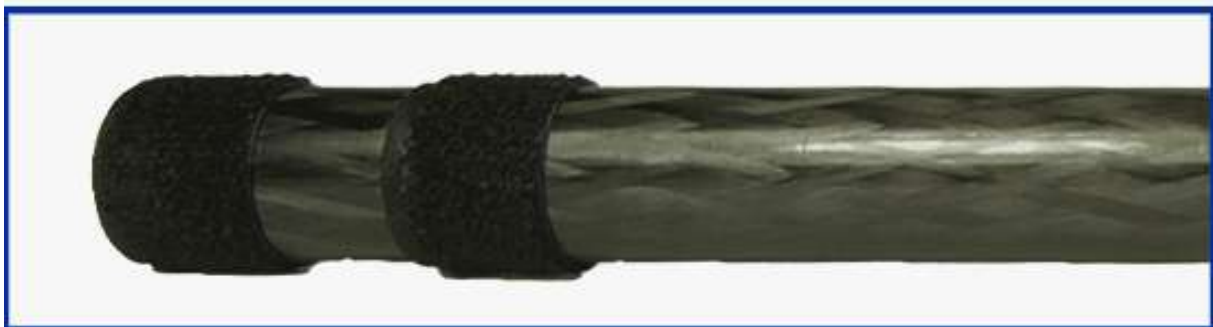

Velcro

[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 20 mm

Outer diameter: 22 mm

Length (RQX5100/22): 920 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 22 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX5100/26



Tube segment for QX 5100

Note: fig. SQX565/26

Please follow length under Technical Details and under RQX5100/26

For easy replacement even in the field, the spare segments are ready made with all necessary parts.


Thus, the boom can be used again immediately.

The complete spare segment SQX5100/26 comprises:

Tube segment diameter = 24/26 mm ([RQX5100/26](#))



Thread incl. Silicone ring ([GOL26](#) incl. [OR26](#))

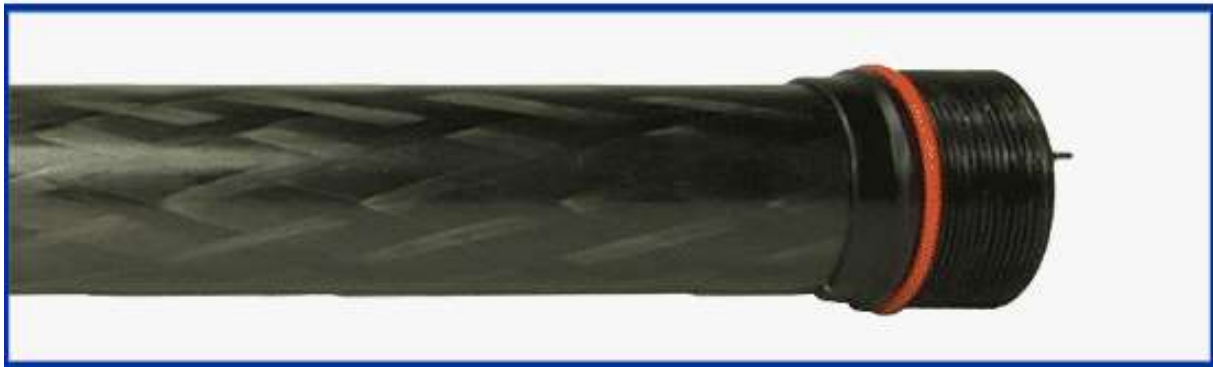

GOL26

Hand nut for thread on tube segment with outer diameter of 30 mm ([MOX30](#))
Compression ring ([RQL30](#))



RQL30

MOX30

[Velkro](#) fitted



Velkro

[Silicone grease](#) for threads and Velkro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 24 mm

Outer diameter: 26 mm

Length (RQX5100/26): 890 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 26 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX5100/30



Tube segment for QX 5100

Note: fig. SQX565/30

Please follow length under Technical Details and under RQX5100/30

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX5100/30 comprises:

Tube segment diameter = 28/30 mm ([RQX5100/30](#))




Thread incl. Silicone ring ([GQL30](#) incl. [OR30](#))



GQL30

Hand nut for thread on tube segment with outer diameter of 34 mm ([MQX34](#))

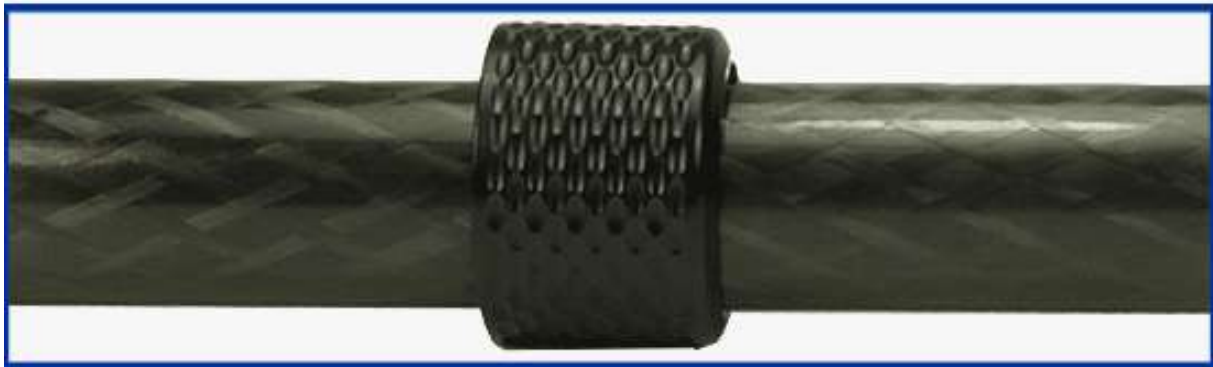

MQX34

Compression ring ([RQL34](#))

[Velcro](#) fitted



Velcro

RQL34

[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 28 mm

Outer diameter: 30 mm

Length (RQX5100/30): 860 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 30 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX5100/34



Tube segment for QX 5100

Note: fig. SQX565/34


Please follow length under Technical Details and under RQX5100/34

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX5100/34 comprises:

Tube segment diameter = 32/34 mm ([RQX5100/34](#))

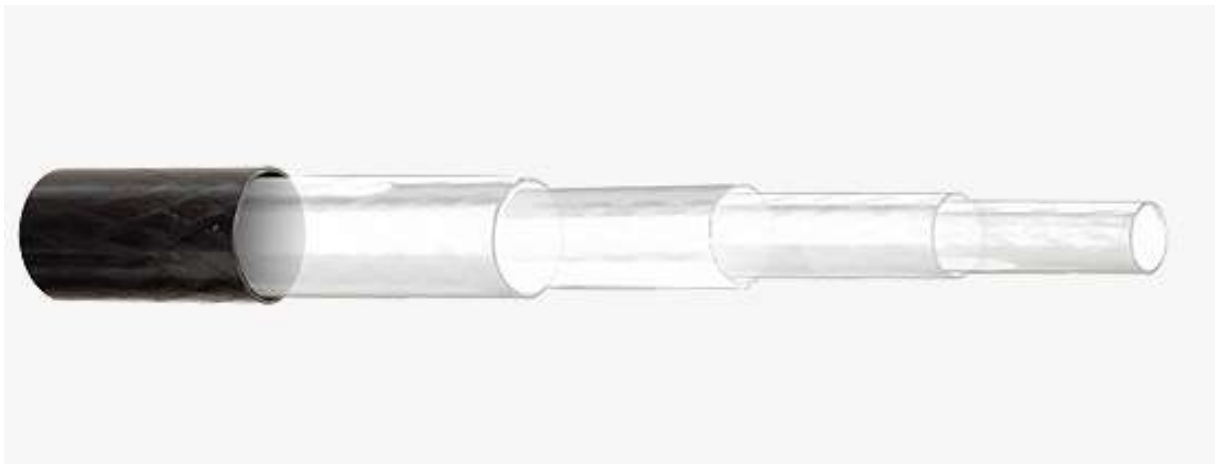

Thread incl. Silicone ring ([GQL34](#) incl. [OR34](#))



GQL30

QX-Endstück ([QSPBX](#))



QSPBX

[Silicone grease](#) for threads and Velcro bushings

Technical Details

Inner diameter: 32 mm

Outer diameter: 34 mm

Length (RQX5100/34): 830 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 34 mm

Metal End: aluminum black anodized

Segments for QX 5130

SQX5130/18



Tube segment for QX 5130

Note: fig. SQX565/18

Please follow length under Technical Details and under RQX5130/18

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX5130/18 comprises:

Tube segment diameter = 16/18 mm ([RQX5130/18](#))



Spare Parts & Spare Segments for QX Boom Pole

Threaded tip incl. leather washer & aluminum ring ([V2AQL](#) incl. [QSPLW](#) and [ALQL](#))



Hand nut for thread on tube segment with outer diameter of 22 mm ([MQX22](#))

Compression ring ([RQL22](#))



[Velcro](#) fitted



[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 16 mm

Outer diameter: 18 mm

Length (RQX5130/18 without tip): 1245 mm

Materials

Tube: carbon fiber, pull-braiding

Threaded tip: stainless steel

Ring: aluminum blue anodized

Hand nut: aluminum black anodized

Compression ring: [POM](#)

SQX5130/22



Tube segment for QX 5130

Note: fig. SQX565/22

Please follow length under Technical Details and under RQX5130/22

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX5130/22 comprises:

Tube segment diameter = 20/22 mm ([RQX5130/22](#))



Thread incl. Silicone ring ([GQL22](#) incl. [OR22](#))



GQL22


Hand nut for thread on tube segment with outer diameter of 26 mm ([MQX26](#))
Compression ring ([RQL26](#))



RQL26

MQX26

[Velcro](#) fitted

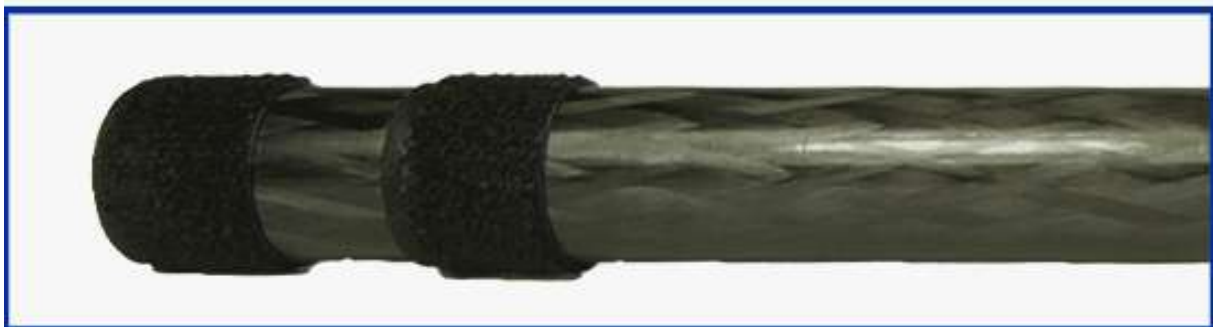

Velcro

[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 20 mm

Outer diameter: 22 mm

Length (RQX5130/22): 1220 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 22 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX5130/26



Tube segment for QX 5130

Note: fig. SQX565/26

Please follow length under Technical Details and under RQX5130/26

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX5130/26 comprises:

Tube segment diameter = 24/26 mm ([RQX5130/26](#))



Thread incl. Silicone ring ([GQL26](#) incl. [OR26](#))



GQL26

Hand nut for thread on tube segment with outer diameter of 30 mm ([MOX30](#))
Compression ring ([RQL30](#))



RQL30

MOX30

[Velcro](#) fitted



Velcro

[Silicone grease](#) for threads and Velcro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 24 mm

Outer diameter: 26 mm

Length (RQX5130/26): 1190 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 26 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX5130/30



Tube segment for QX 5130

Note: fig. SQX565/30

Please follow length under Technical Details and under RQX5130/30

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX5130/30 comprises:

Tube segment diameter = 28/30 mm ([RQX5130/30](#))




Thread incl. Silicone ring ([GQL30](#) incl. [OR30](#))



GQL30

Hand nut for thread on tube segment with outer diameter of 34 mm ([MQX34](#))

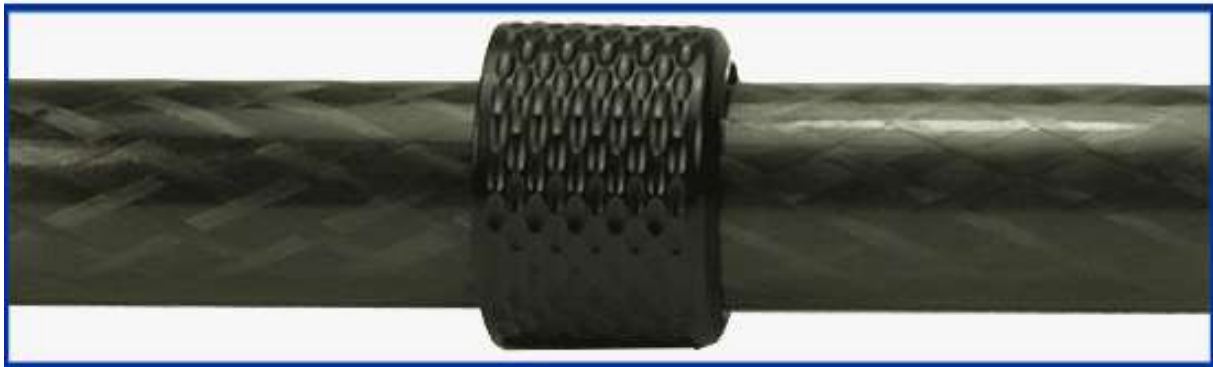

MQX34

Compression ring ([RQL34](#))

[Velkro](#) fitted



Velkro

RQL34

[Silicone grease](#) for threads and Velkro bushings



Spare Parts & Spare Segments for QX Boom Pole

Technical Details

Inner diameter: 28 mm

Outer diameter: 30 mm

Length (RQX5130/30): 1160 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 30 mm

Hand nut: aluminum black anodized

Compression ring: POM

SQX5130/34



Tube segment for QX 5130

Note: fig. SQX565/34


Please follow length under Technical Details and under RQX5130/34

For easy replacement even in the field, the spare segments are ready made with all necessary parts.

Thus, the boom can be used again immediately.

The complete spare segment SQX5100/34 comprises:

Tube segment diameter = 32/34 mm ([RQX5130/34](#))

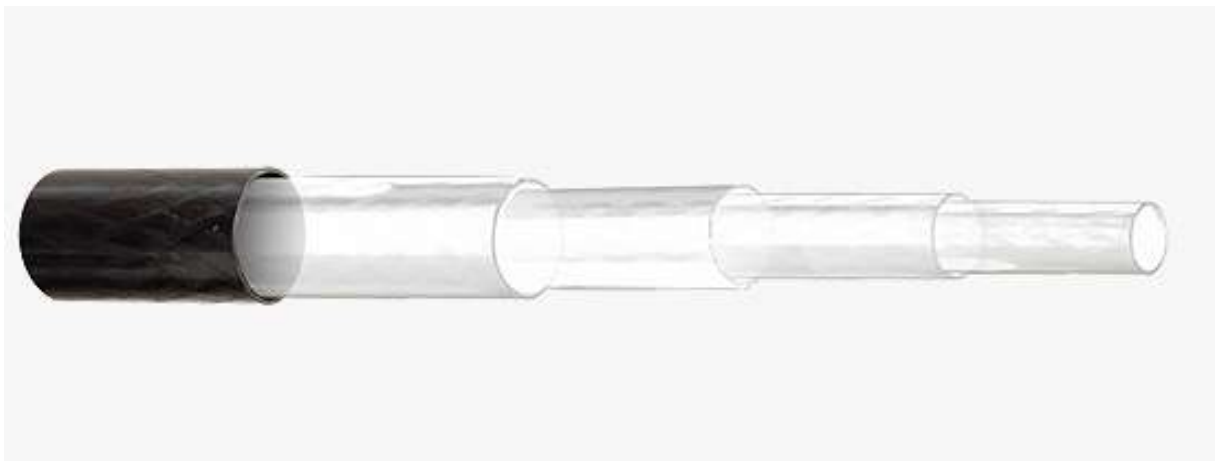

Thread incl. Silicone ring ([GQL34](#) incl. [OR34](#))



GQL30

QX-Endstück ([QSPBX](#))



QSPBX

[Silicone grease](#) for threads and Velcro bushings

Technical Details

Inner diameter: 32 mm

Outer diameter: 34 mm

Length (RQX5100/34): 1130 mm

Materials

Tube: carbon fiber, pull-braiding

Thread: aluminum black anodized

Ring: Silicone 50°, 34 mm

Metal End: aluminum black anodized

QX-Standard-Tonangel, Ersatzteile – einzeln

Hand nut, thread, compression ring, and more. ...

ALQL



Aluminum ring blue anodized

GQL22

GQL26

GQL30

GQL34



Threads are available in four sizes:

GQL22 for QX-Tube RQX550/22, RQX565/22, RQX580/22, RQX5100/22 and RQX5130/22 with an outer diameter of 22 mm

GQL26 for QX-Tube RQX550/26, RQX565/26, RQX580/26, RQX5100/26 and RQX5130/26 with an outer diameter of 26 mm

GQL30 for QX-Tube RQX550/30, RQX565/30, RQX580/30, RQX5100/30 and RQX5130/30 with an outer diameter of 30 mm

GQL34 for QX-Tube RQX550/34, RQX565/34, RQX580/34, RQX5100/34 and RQX5130/34 with an outer diameter of 34 mm

Mending the booms requires [glue](#), [velkro](#) and [grease](#) (please order separately)

Glue

2-component glue for all Segments, 50 ml



MQX22

MQX26

MQX30

MQX34



MQX22 Hand nut for thread diameter = 22 mm (GQL22)

MQX26 Hand nut for thread diameter = 26 mm (GQL26)

MQX30 Hand nut for thread diameter = 30 mm (GQL30)

MQX34 Hand nut for thread diameter = 34 mm (GQL34)

Mending the booms requires [glue](#), [velkro](#) and [grease](#) (please order separately)

Technical Details

Diameter:

Diameter 22 mm for SQX550/18, SQX565/18, SQX580/18, SQX5100/18 and SQX5130/18

Diameter 26 mm for SQX550/22, SQX565/22, SQX580/22, SQX5100/22 and SQX5130/22

Diameter 30 mm for SQX550/26, SQX565/26, SQX580/26, SQX5100/26 and SQX5130/26

Diameter 34 mm for SQX550/34, SQX565/34, SQX580/34, SQX5100/34 and SQX5130/34

Material:

Aluminum black anodized

P35



Rubber bumper

The robust rubber bumper fits with the 5th tube segment (Outer diameter=34mm) of the QX boom pole and Jumbo QP 5190 and QP 6200.

Technical Details

Inner diameter: 34 mm

Weight: 40 g

QXEST

QXS-Endpiece, complete for internal cabling

Metal End QXS w/ thread incl. rubber bumper (P35)



Single parts of QXEST:




- 1) Outer shell, aluminum black anodized
- 2) Base, made out of POM, with two threaded holes
- 3) Inner strain relief, made out of POM
- 4) Two grub-screws M4
- 5) MQX-ERM, knurled ring nut for mounting on tot he boom
- 6) P35, rubber sleeve

QXOR

Silicone Ring Kit

O-Ring kit for the threads (GQLxx) of the QX boom poles

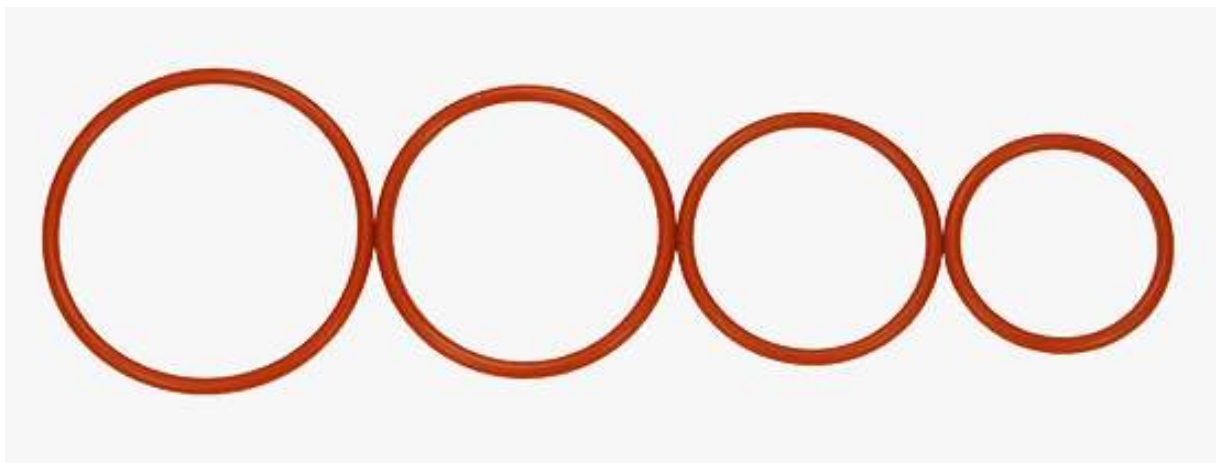

QPRQL

Compression ring kit contains:

RQL18/22

RQL22/26

RQL26/30

RQL30/34



Mending the booms requires [glue](#), [velkro](#) and [grease](#) (please order separately)

Technical Details

Diameter:

RQL22: Inner diameter=16 mm, Outer diameter=18 mm

RQL26: Inner diameter=22 mm, Outer diameter=26 mm

RQL30: Inner diameter=26 mm, Outer diameter=30 mm

RQL34: Inner diameter=30 mm, Outer diameter=34 mm

Material:

[POM](#)

QXRS22
QXRS26
QXRS30
QXRS34



Complete locking system kit including:
Thread ([GQLxx](#)), [Silicone ring](#), compression ring ([ROXxx](#)) and hand nut ([MOXxx](#))

(xx is equivalent to QX segment OD-size)

Available in four sizes:

QXRS22 for QX tube, outer diameter: 18 mm
(kit composed of: GQL22, OR22, RQX22 and MQX22)

QXRS26 for QX tube, outer diameter: 22 mm
(kit composed of: GQL26, OR26, RQX26 and MQX26)

QXRS30 for QX tube, outer diameter: 26 mm
(kit composed of: GQL30, OR30, RQX30 and MQX30)

QXRS34 for QX tube, outer diameter: 30mm
(kit composed of: GQL34, OR34, RQX34 and MQX34)

Mending the booms requires [glue](#), [velkro](#) and [grease](#) (please order separately)

QSPBX



Endpiece for QX boom poles

Technical Details

Material: aluminum black anodized

Height: 40 mm

Outer diameter: ca. 32

Weight: 14 g

QSPLW



The leather washers on all Ambient 3/8" threads help to fix windshields or microphone suspensions rattle free and, due to its dynamic properties, guarantees reliable hold.

RQL22

RQL26

RQL30

RQL34

Compression rings available in four sizes:

RQL22 for QX segments (SQX550/18, SQX565/18, SQX580/18, SQX5100/18 and SQX5130/18)

RQL26 for QX segments (SQX550/22, SQX565/22, SQX580/22, SQX5100/22 and SQX5130/22)

RQL30 for QX segments (SQX550/26, SQX565/26, SQX580/26, SQX5100/26 and SQX5130/26)

RQL34 for QX segments (SQX550/34, SQX565/34, SQX580/34, SQX5100/34 and SQX5130/34)



Mending the booms requires [glue](#), [velkro](#) and [grease](#) (please order separately)

Technical Details

Diameter:

RQL22: Inner diameter=20 mm, Outer diameter=22 mm

RQL26: Inner diameter=24 mm, Outer diameter=26 mm

RQL30: Inner diameter=28 mm, Outer diameter=30 mm

RQL34: Inner diameter=33 mm, Outer diameter=34 mm

Material:

POM

Silicone grease



Silicone grease for threads and Velcro bushings

Silicone grease is contained in purchased parts package of every single spare tube segment

V2AQL

Stainless steel 3/8" threaded tip for QP booms.

Assembly needs [a 2-component glue](#) (please order separately)



Technical Details

Diameter: 3/8" thread

Length: 60 mm

Weight: 22 g

Material: stainless steel

Velkro

Old Velkro can be replaced with new Velkro

Self-adhesive frieze band for all Quickpole Boom Poles, approx. 1 m, with Silicone grease



Greenware

THIS CHAPTER SERVES ONLY AS ORIENTATION, GREENWARE IS NOT FOR SALE

RQX550/18

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 16 mm

Outer diameter: 18 mm

Length: 445 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX550/22

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 20 mm

Outer diameter: 22 mm

Length: 420 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX550/26

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 24 mm

Outer diameter: 26 mm

Length: 390 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX550/30

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 28 mm

Outer diameter: 30 mm


Length: 360 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX550/34

CF-Tube, raw (greenware)

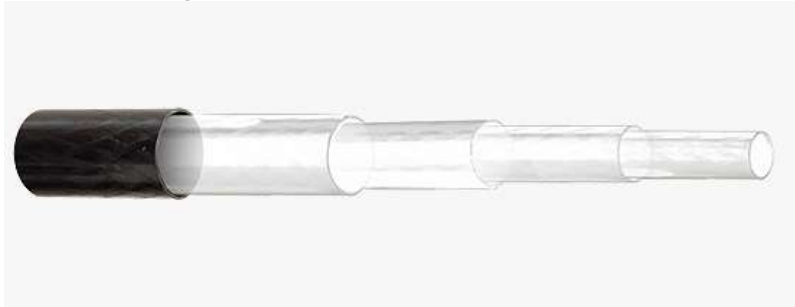

Technical Details

Inner diameter: 32 mm

Outer diameter: 34 mm

Length: 330 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX565/18

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 16 mm

Outer diameter: 18 mm

Length: 595 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX565/22

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 20 mm

Outer diameter: 22 mm

Length: 570 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX565/26

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 24 mm

Outer diameter: 26 mm

Length: 540 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX565/30

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 28 mm

Outer diameter: 30 mm

Length: 510 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX565/34

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 32 mm

Outer diameter: 34 mm

Length: 480 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX580/18

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 16 mm

Outer diameter: 18 mm

Length: 745 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX580/22

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 20 mm

Outer diameter: 22 mm

Length: 720 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX580/26

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 24 mm

Outer diameter: 26 mm

Length: 690 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX580/30

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 28 mm

Outer diameter: 30 mm

Length: 660 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX580/34

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 32 mm

Outer diameter: 34 mm

Length: 630 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX5100/18

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 16 mm

Outer diameter: 18 mm

Length: 945 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX5100/22

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 20 mm

Outer diameter: 22 mm

Length: 920 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX5100/26

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 24 mm

Outer diameter: 26 mm

Length: 890 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX5100/30

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 28 mm

Outer diameter: 30 mm


Length: 860 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX5100/34

CF-Tube, raw (greenware)

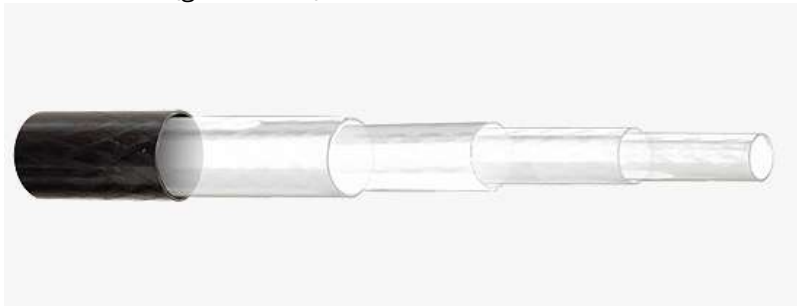

Technical Details

Inner diameter: 32 mm

Outer diameter: 34 mm

Length: 830 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX5130/18

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 16 mm

Outer diameter: 18 mm

Length: 1245 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX5130/22

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 20 mm

Outer diameter: 22 mm

Length: 1220 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX5130/26

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 24 mm

Outer diameter: 26 mm

Length: 1190 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX5130/30

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 28 mm

Outer diameter: 30 mm

Length: 1160 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm

RQX5130/34

CF-Tube, raw (greenware)



Technical Details

Inner diameter: 32 mm

Outer diameter: 34 mm

Length: 1130 mm

Material: carbon fiber, pull-braiding

Wall thickness: 1 mm