



TC-TRX

WIRELESS TIMECODE LINK

The Ambient Timecode Link has a transceiver module.

The module can be configured to be either

Transmitter – LED lights up green

Or

Receiver – LED lights up red



There is a sliding switch inside the battery compartment to change the configuration.

Towards outside = transmitter


Towards inside = receiver.



experience quality.

TC-TRX

In/Out is on a LEMO 5-pin socket like all our time code equipment (and Sound Devices, Aaton, Zaxcom etc.) to ensure best compatibility:



Pin 1 = ground/shield

Pin 2 = TC - in

Pin 5 = TC - out



Mating connector: LEMO FGG/JGG.0B.305.CLADxx(ZN)

The TC-TRX is shipped with one mating LEMO connector.

Two AA batteries and use about $\leq 10\text{mA}$ in TX-mode, $\leq 20\text{mA}$ in RX-mode, power the units.

The modulation is an "amplitude manipulation" on 433 MHz (" B ", antenna marked red), 418 MHz (" A ", antenna marked blue) or 315MHz (" C ", antenna marked green) range with that is comparable with a normal radio mike.

We ship the TC-TRX with a reduced length quarter wave antenna, length is 51mm. Replacements and alternatives available on request.

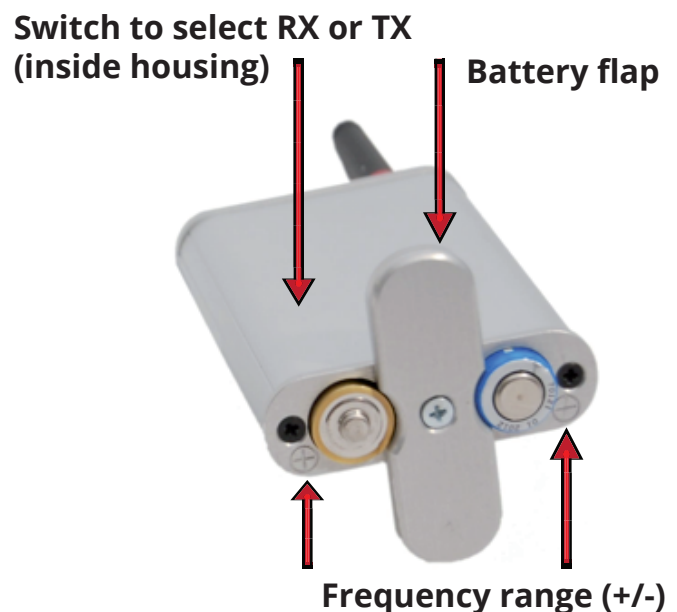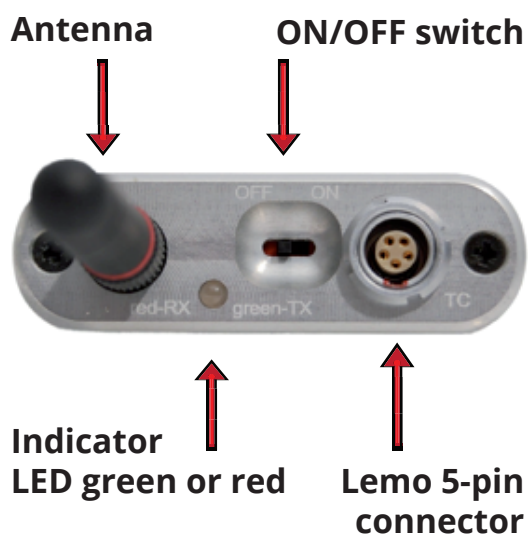

Technical Details

Frequency range:	A = 418MHz B = 433MHz C = 315MHz
TX Output power:	5 – 10mW (75 Ohms)
Powering:	3 Volt, 2x AA-battery (Mignon-battery, each 1.5V)
Power consumption:	TX-mode $\leq 10\text{mA}$ RX-mode $\leq 20\text{mA}$
Modulation:	AM (amplitude manipulation)
Types of antennas:	Reduced length quarter wave, SMA connector 418MHz: blue marked 433MHz: red marked 315MHz: green marked
Standard length:	5.1cm (helical) Replacements and alternatives available on request
TC-input level (TX-mode):	$\geq 250\text{mV}$ (peak to peak) ($R_{in} = 10\text{k}\Omega$)
TC-output level (RX-mode):	0 – 3 Volt (peak to peak) settable, $R_L \geq 1\text{k}\Omega$
Sensibility in RX-mode:	-112dBm
Indication:	TX-mode: LED lights up green RX-mode: LED lights up red
Connector:	LEMO 5-pin, FGG/JGG.0B.305.CLADxx (ZN) Pin 1 = ground / shield Pin 2 = TC – in Pin 5 = TC – out
Dimensions:	5.7cm x 9.2cm x 1.8cm (without antenna)
Weight:	100 grams (without batteries)
Housing:	Aluminum profile housing, anodized

experience quality.

TC-TRX

MADE IN GERMANY

Ambient Recording GmbH

Schleissheimer Straße 181c | DE - 80797 Munich | vox +49 89 36005510-0 | fax +49 89 651855
www.ambient.de/en | info@ambient.de

© 2015 Ambient Recording GmbH